

PORT FOR AUTOCLAVE & VACUUM LEAK TEST APPLICATION

The VPA243 provides a fast and simple solution for the installation of validation RTDs. The body is machined from SS316L bar stock and is offered with 2" Triclamp connection as standard.

Offered for use with 4, 7 & 9 RTDs

When the number of RTDs required is greater than 9, then a 'Y' assembly may be used to mount two VPA243 ports to increase the capacity.

- Individual holes for upto 9 RTDs
- Individual replacement of single RTDs
- 3 - part sealant arrangement
- Silicon Rubber gaskets for sealing




REMOVABLE HANDLE

SPECIFICATIONS

- Gland Body Material : Machined from SS316L
- Finish : Better than 0.6 micron for wetted parts
- Standard Mounting : 2" Tri-clamp
(Consult sales for other sizes)
- Capacity : Upto 9 RTDs
- Pressure Rating : 3 bar
- Temperature Rating : 150°C max
- Sealant Material : Silicon Rubber

HOW TO ORDER

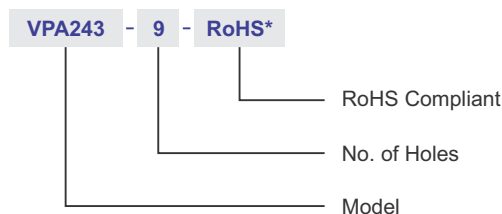

* RoHS Compliance optional

RELATED PRODUCTS

RTD FOR VALIDATION PORT	
<p>MODEL : RAC251</p>	<ul style="list-style-type: none"> • Pt-100, 3-wire • 0...150°C • 1/3 DIN accuracy • 6mm x 50mm, SS316L tip • Teflon insulated cable in multiples of 1 meter
ACCESSORIES	
<p>MODEL : TC50x21.5</p>	<ul style="list-style-type: none"> • Mating Tri-clamp • SS316L
<p>MODEL : CA50 / CC50</p>	<ul style="list-style-type: none"> • Mounting Clamp • SS304 / SS316
<p>MODEL : YTC480</p>	<ul style="list-style-type: none"> • Y - adaptor • SS316L
<p>MODEL : GF</p>	<ul style="list-style-type: none"> • Silicon gasket
<p>MODEL : RTC538</p>	<ul style="list-style-type: none"> • Reducer / Expander • SS316L

OTHER PRODUCTS FROM RADIX

<p>THERMOCOUPLE PORT VPA241</p>	<p>SANITARY RTD</p>	<p>AUTOCLAVE RTD</p>	<p>VALIDATION RTD</p>	<p>SANITARY GAUGE</p>
--	----------------------------	-----------------------------	------------------------------	------------------------------