


SOCKET WELD, LEAKPROOF

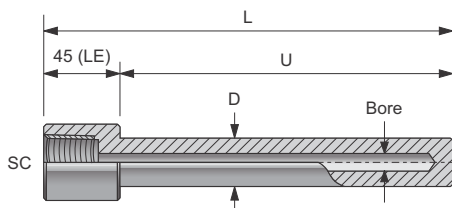

Standard Material : SS304 / SS316

SC : 1/2" BSP/NPSM

U : 50 / 100 / 150... upto 1200mm

Bore : 6.5mm for 6mm dia sensors

D : 16mm & 19mm

Specify 'U'

Other threads, lengths, sizes, materials on request

ORDER CODE

TBR300 — C — 16 — 6.5 — 100 — 145 — G12 — X

MODEL

OTHER

WELL MATERIAL

PROCESS CONNECTION

CODE	MATERIAL
A	SS304
B	Inconel 600
B1	Inconel 601
B4	Inconel 690
C	SS316
CL	SS316L
D	SS310
E	SS446
F	Carboon steel
BR	Brass
Q	Monel
T	Titanium
U6	Hastalloy C276
U2	Hastalloy C22
X	Other Materials

CODE	THREAD
G14	1/4" BSPP
G12	1/2" BSPP
G34	3/4" BSPP
G25	1" BSPP
G38	1 1/2" BSPP
R12	1/2" BSPT
R34	3/4" BSPT
N14	1/4" NPT/NPSM
N12	1/2" NPT/NPSM
N34	3/4" NPT/NPSM
N25	1" NPT/NPSM
N38	1 1/2" NPT/NPSM
M20	M20 x 2.5
M27	M27 x 2
M33	M33 x 2

SHANK OD 'D'

TOTAL LENGTH 'L'

BORE

INSERTION LENGTH 'U'

Abbreviations : SC - Sensor Connection, LE - Lag Extension, L - Total Length, U - Insertion Length,

All dimensions are in mm, unless otherwise specified.



Tel : +91 22 41929999 / 42537777

Email : sensors@radix.co.in • www.radix.co.in