



- Universal input
- 1 / 2 / 3 setpoints
- Isolated 0/4~20 mA or 0-10V DC for control / retransmission output
- RS485 / MODBUS RTU
- 85~265 V AC SMPS
- Autotuning : From cold start
At setpoint
- Auto / Manual selection
- PID, Proportional and ONOFF control
- PID versions
Standard - relay or analog control output
VMD open + close relay outputs

SPECIFICATIONS

All specifications at ambient of 25 °C, unless specified otherwise

INPUT		PROGRAMMABLE PARAMETERS	
Input group 1		Setpoint	Full range (See Table 1)
Thermocouple	B, E, J, K, N, R, S, T	Unit	°C, °F, EU
RTD	Pt100, 3-wire	Resolution	User selectable
Voltage	0~50 mV		0.01, 0.1 or 1 for linear input,
Current	0~20 mA, 4~20 mA		0.1 or 1 for temperature
Input group 2		High scale	Full range (See Table 1)
Thermocouple	B, C, D, E, G, J, K, N, R, S, T	Low scale	Full range (See Table 1)
RTD	Pt100, 3-wire, Cu53	Digital filter	A (minimum) ~ F (maximum)
Current	0~20 mA, 4~20 mA, square root	Hysteresis (ONOFF control)	0~25% span
Voltage	0~50 mV	Offset	-50 to 50% of range limit
Transmitter supply	22 V nominal, 30 mA max	Band (P)	0.1~999.9%
Range limits	See Table 1	Integral time (I)	Off, 1~9999 seconds
Accuracy	See Table 1	Derivative time (D)	Off, 1~9999 seconds
Cold junction compensation	Automatic	Cycle time for SP1/SP2	1~640 second
Sensor break protection	User programmable	Upper limit for output power	0~100%
		Lower limit for output power	0~100%
INDICATION		Relay logic	a. Heat b. Cool c. Full scale high alarm d. Full scale low alarm e. Deviation high alarm f. Deviation low alarm g. Inband alarm h. Outband alarm (e. to h. available for SP2, SP3 only)
Process variable	Upper : 4 digit, 7 segment 0.3" (7.6 mm) red LED display	Alarm types	Self reset or latched and can be disabled at power on
Setpoint	Lower : 4 digit, 7 segment 0.3" (7.6 mm) green LED display	Alarm acknowledge	Front panel function used to reset relay in alarm condition
Status indication	LEDs for relay status LED for auto/manual status	Setpoint lock	ON, OFF
		Level lock	ON, OFF
		Relay action	Reverse / direct
OUTPUTS		OTHER	
(See ordering information)		Programming	Through 3 tactile keys
No. of outputs	1 / 2 / 3	Dimensions (in mm)	48(H) x 48(W) x 100(D)
No. of relays	1 / 2 / 3	Mounting	Panel mount
Relay contact type	NO-C-NC (RL1) NO-C (RL2, RL3)	Panel cutout	44 x 44 mm
Relay contact rating	5A / 230V AC, resistive	Supply voltage	a) 85~265 V AC, 50/60 Hz b) 20~35 V DC (optional)
SSR drive	12 V DC drive signal for external SSR	Power consumption	4 watts maximum
No. of analog outputs	0 / 1 (current or voltage)	Operating ambient temperature	0~50 °C
Current output	4~20 mA / 0~20 mA / 20~4 mA / 20~0 mA isolated from input	Relative humidity	Below 90%, non condensing
Maximum load for current output	500 ohms		
Voltage output	0-10 V / user specified		
Load for voltage output	>10 Kohms		
AUTO/MANUAL OPERATION			
Function	Output power is increased / decreased by UP/DOWN keys in manual mode		
Auto / Manual transfer	Bumpless		
COMMUNICATION			
Port	RS485		
Protocol	Modbus RTU		
Slave ID	User programmable (1~256)		

TABLE 1


SENSOR / INPUT	RANGE LIMITS (°C / EU)		RANGE IN WHICH ACCURACY IS SPECIFIED		TYPICAL ACCURACY AT 30 °C (°C / EU)	WORST CASE ACCURACY (°C / EU)
	LOW SCALE	HIGH SCALE	LOW SCALE	HIGH SCALE		
Input Group 1						
Pt - 6% Rh / Pt - 30% Rh (B)	400	1820	400	1820	± 3	± 5
Chromel / Constantan (E)	-270	850	0	850	± 1	± 3
Iron / Constantan (J)	-210	760	0	760	± 1	± 3
Chromel / Alumel (K)	-270	1372	-50	1200	± 1	± 3
Nicrosil / Nisil (N)	-270	1300	-50	1200	± 1	± 3
Pt / Pt - 13% Rh (R)	0	1760	400	1760	± 2	± 5
Pt / Pt - 10% Rh (S)	0	1760	400	1760	± 2	± 5
Copper / Constantan (T)	-270	400	-200	400	± 1	± 3
Pt100, 3-wire	-200	850	-200	600	± 0.3	± 1.0
Linear (0~50 mV, 0~20 mA, 4~20 mA)	-1999	9999	-1999	9999	± 5 EU	± 20 EU

Input Group 2

The following inputs are available in Input Group 2 in addition to inputs of Input Group 1.

Tungsten - 5% Rh / Tungsten - 26% Rh (C)	0	2320	0	2320	± 3	± 5
Tungsten - 3% Rh / Tungsten - 25% Rh (D)	0	2310	0	2310	± 3	± 5
Tungsten / Tungsten - 26% Rh (G)	0	2310	0	2310	± 3	± 5
Cu53	0	180	0	180	± 0.3	± 0.5
Linear (4~20 mA) with square root	0	9999	0	9999	± 10 EU	± 40 EU

CONNECTION DIAGRAM

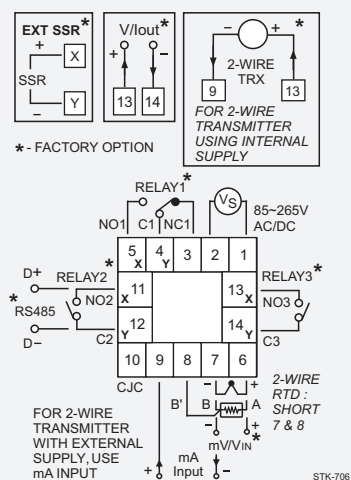

ORDERING INFORMATION

ORDER CODE	
2001	A

A	Configuration			
	SSR drive	Relay	RS485	4~20 mA output
00	0	2	0	0
01	0	2	0	1
02	0	2	1	0
03	0	1	1	1
04	1	1	0	0

Ordering Options

The following ordering options are available on request. Minimum order quantity and/or minimum order value may apply.

	Option	Details
1.	Analog output	0~10 V DC
2.	Supply voltage	24 V DC
3.	Input type	Group 2

Note 1 : Transmitter supply can be given only if Relay 3 / Analog o/p is absent.

Note 2 : For supply voltage = 24 VDC, Relay 3 cannot be provided.



INSTRUMENTS T : + 91 22 42537777 x 701 F : + 91 22 42537700 E : sales@radix.co.in
 SENSORS T : + 91 22 42537777 x 732 F : + 91 22 42537700 E : sensors@radix.co.in
 GAUGES T : + 91 22 42537777 x 733 F : + 91 22 42537700 E : gauges@radix.co.in
 AUTOMATION C : 0-9322405471 C : 0-9324319150 E : automation@radix.co.in

SALES INQUIRIES

1800-22-radix
1800-22-7234

Radix Electrosystems Pvt Ltd, B-14, 2nd Floor, Ghanshyam Indl Estate, Veera Desai Road, Andheri (West), Mumbai - 400 053, India
 Tel : + 91 22 42537777 Fax : + 91 22 42537700 Email : sales@radix.co.in www.radix.co.in

www.radix.co.in