


**WELD-IN, LEAK PROOF**

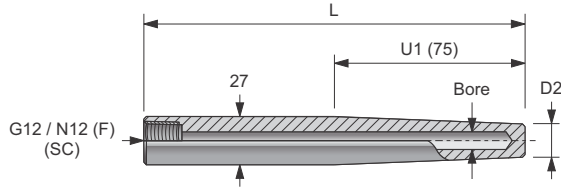

Standard Material : SS304 / SS316  
 SC : 1/2" BSP/NPSM  
 L : 100 / 150 / 200... upto 1200mm  
 Bore : 6.5mm for 6mm dia sensors  
 D1 : 27mm  
 D2 : 13mm to 16mm, to be specified  
 Specify 'U1'  
 Other threads, lengths, sizes, materials on request

**ORDER CODE**

**TBR402 - C - 27 - 13 - 6.5 - 75 - 145 - G12 - X**

CODE	MATERIAL
A	SS304
B	Inconel 600
B1	Inconel 601
B4	Inconel 690
C	SS316
CL	SS316L
D	SS310
E	SS446
F	Carboon steel
BR	Brass
Q	Monel
T	Titanium
U6	Hastalloy C276
U2	Hastalloy C22
X	Other Materials

CODE	THREAD
G12	1/2" BSPP
N12	1/2" NPT/NPSM

**MODEL** ———— TBR402  
**WELL MATERIAL** ———— C  
**SHANK OD 'D1'** ———— 27  
**TAPERED END OD 'D2'** ———— 13  
**BORE** ———— 6.5  
**TAPERED LENGTH 'U1'** ———— 75  
**TOTAL LENGTH 'L'** ———— 145  
**SENSOR CONNECTION** ———— G12  
**OTHER** ———— X

Abbreviations : SC - Sensor Connection, L - Total Length, D1 - Major Diameter, D2 - Minor Diameter, U1 - Insertion Length, Minor Shank

All dimensions are in mm, unless otherwise specified.



Tel : +91 22 41929999 / 42537777  
 Email : sensors@radix.co.in • www.radix.co.in