



- Universal input
- 1 / 2 / 3 / 4 setpoints
- Isolated 0/4~20 mA or 0~10 V DC for control / retransmission output
- RS485 / MODBUS RTU
- 85~265 V AC SMPS
- Autotuning : From cold start
At setpoint
- Auto / Manual selection
- PID, Proportional and ONOFF control
- PID versions

Standard - relay or analog control output
VMD open + close relay outputs


SPECIFICATIONS All specifications at ambient of 25 °C, unless specified otherwise

| | | | |
|--|---|---|---|
| <p>INPUTS</p> <p>Input group 1 Thermocouple RTD Voltage Current</p> <p>Input group 2 Thermocouple RTD Current Voltage</p> <p>Transmitter supply Range limits Accuracy Cold junction compensation Sensor break protection</p> <p>INDICATION</p> <p>Process variable</p> <p>Setpoint</p> <p>Status indication</p> <p>OUTPUTS</p> <p>No. of relays Relay contact type</p> <p>Relay contact rating SSR drive</p> <p>Current output</p> <p>Maximum load for current output</p> <p>Voltage output Load for voltage output</p> <p>AUTO/MANUAL OPERATION</p> <p>Function</p> <p>Auto / Manual transfer</p> | <p>B, E, J, K, N, R, S, T Pt100, 3-wire 0~50 mV 0~20 mA, 4~20 mA</p> <p>B, C, D, E, G, J, K, N, R, S, T Pt100, 3-wire, Cu53 0~20 mA, 4~20 mA, Square root 0~50 mV Through DIP selection following voltage inputs are available : 0~1 V, 0~5 V, 0~10 V, 0~10 mV, 0~100 mV, 0~200 mV 22 V nominal, 30 mA max See Table 1 See Table 1 Automatic User programmable</p> <p>Upper : 4 digit, 7 segment 0.56" (14.2 mm) red LED display Lower : 4 digit, 7 segment 0.39" (9.9 mm) green LED display LEDs for relay status, LED for auto / manual status</p> <p>1 / 2 / 3 / 4 NO-C-NC (RL1, RL2) NO-C (RL3, RL4) 5A / 230V AC, resistive 12 V DC drive signal for external SSR 4~20 mA / 0~20 mA / 20~4 mA / 20~0 mA isolated from input 500 ohms</p> <p>0~10 V / user specified >10 Kohms</p> <p>Output power is increased / decreased by UP/DOWN keys in manual mode Bumpless</p> | <p>COMMUNICATION</p> <p>Port Protocol Slave ID</p> <p>PROGRAMMABLE PARAMETERS</p> <p>Setpoint Unit Resolution</p> <p>High scale Low scale Digital filter Hysteresis (ONOFF control) Offset Band (P) Integral time (I) Derivative time (D) Cycle time for SP1/SP2 Upper limit for output power Lower limit for output power Relay logic</p> <p>Alarm types</p> <p>Alarm acknowledge</p> <p>Setpoint lock Level lock Relay action</p> <p>OTHER</p> <p>Programming Dimensions (in mm) Mounting Panel cutout Supply voltage</p> <p>Power consumption Operating ambient temperature Relative humidity</p> | <p>RS485 Modbus RTU User programmable (1~256)</p> <p>Full range (See Table 1) °C, °F, EU User selectable 0.01, 0.1 or 1 for linear input, 0.1 or 1 for temperature Full range (See Table 1) Full range (See Table 1) A (minimum) ~ F (maximum) 0~25% span -50 to 50% of range limit 0.1~999.9% Off, 1~9999 seconds Off, 1~9999 seconds 1~640 second 0~100% 0~100% a. Heat b. Cool (ON/OFF only) c. Fullscale high alarm d. Full scale low alarm e. Deviation high alarm f. Deviation low alarm g. Inband alarm h. Outband alarm (e. to h. available for SP2, SP3, SP4 only) Self reset or latched and can be disabled at power on Front panel function used to reset relay in alarm condition ON, OFF ON, OFF Reverse / direct</p> <p>Through 3 tactile keys 48(H) x 96(W) x 100(D) Panel mount 44(+ 0.8 mm) x 92 mm a) 85~265 V AC, 50/60 Hz b) 20~35 V DC (optional) 4 watts maximum 0~50 °C Below 90%, non condensing</p> |
|--|---|---|---|


TABLE 1

| SENSOR / INPUT | RANGE LIMITS (°C / EU) | | RANGE IN WHICH ACCURACY IS SPECIFIED | | TYPICAL ACCURACY AT 30 °C (°C / EU) | WORST CASE ACCURACY (°C / EU) |
|---|------------------------|------------|--------------------------------------|------------|-------------------------------------|-------------------------------|
| | LOW SCALE | HIGH SCALE | LOW SCALE | HIGH SCALE | | |
| Input Group 1 | | | | | | |
| Pt - 6% Rh / Pt - 30% Rh (B) | 400 | 1820 | 400 | 1820 | ± 3 | ± 5 |
| Chromel / Constantan (E) | -270 | 850 | 0 | 850 | ± 1 | ± 3 |
| Iron / Constantan (J) | -210 | 760 | 0 | 760 | ± 1 | ± 3 |
| Chromel / Alumel (K) | -270 | 1372 | -50 | 1200 | ± 1 | ± 3 |
| Nicrosil / Nisil (N) | -270 | 1300 | -50 | 1200 | ± 1 | ± 3 |
| Pt / Pt - 13% Rh (R) | 0 | 1760 | 400 | 1760 | ± 2 | ± 5 |
| Pt / Pt - 10% Rh (S) | 0 | 1760 | 400 | 1760 | ± 2 | ± 5 |
| Copper / Constantan (T) | -270 | 400 | -200 | 400 | ± 1 | ± 3 |
| Pt100, 3-wire | -200 | 850 | -200 | 600 | ± 0.3 | ± 1.0 |
| Linear (0~50 mV, 0~20 mA, 4~20 mA) | -1999 | 9999 | -1999 | 9999 | ± 5 EU | ± 20 EU |
| Input Group 2 | | | | | | |
| The following inputs are available in Input Group 2 in addition to inputs of Input Group 1. | | | | | | |
| Tungsten - 5% Rh / Tungsten - 26% Rh (C) | 0 | 2320 | 0 | 2320 | ± 3 | ± 5 |
| Tungsten - 3% Rh / Tungsten - 25% Rh (D) | 0 | 2310 | 0 | 2310 | ± 3 | ± 5 |
| Tungsten / Tungsten - 26% Rh (G) | 0 | 2310 | 0 | 2310 | ± 3 | ± 5 |
| Cu53 | 0 | 180 | 0 | 180 | ± 0.3 | ± 0.5 |
| Linear (0~10 mV, 0~100 mV, 0~200 mV, 0~1 V, 0~5 V, 0~10 V) | -1999 | 9999 | -1999 | 9999 | ± 5 EU | ± 20 EU |
| Linear (4~20 mA) with square root | 0 | 9999 | 0 | 9999 | ± 10 EU | ± 40 EU |

CONNECTION DIAGRAM

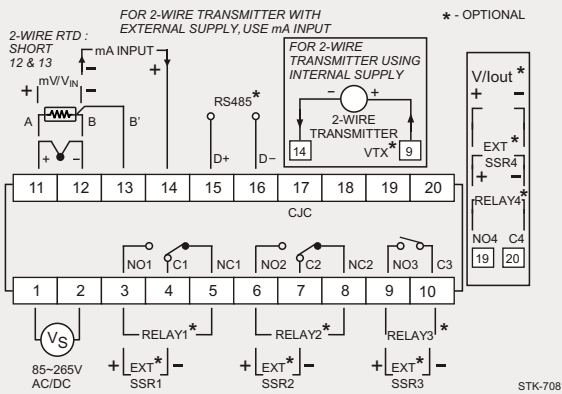

ORDERING INFORMATION

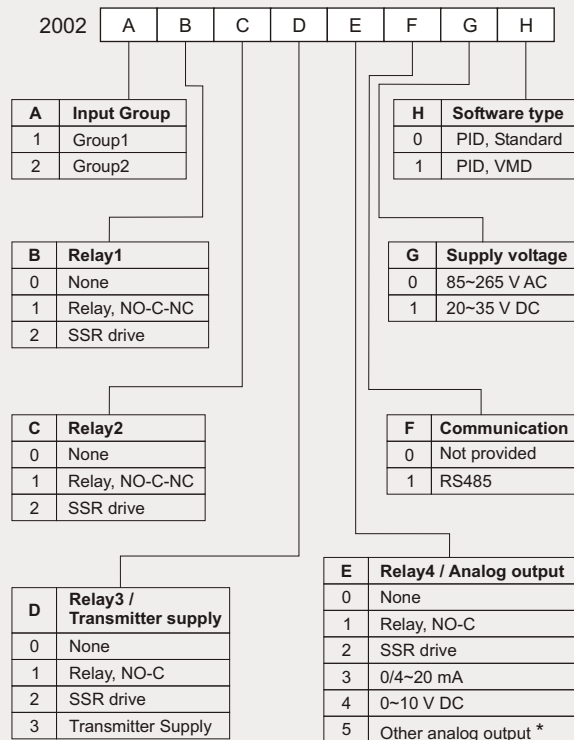

* Please specify



AN ISO 9001:2000 COMPANY

SALES INQUIRIES

1800-22-radix
1800-22-7234

www.radix.co.in

Radix Electrosystems Pvt Ltd
B-14, 2nd Floor, Ghanshyam Indl Estate
Veera Desai Road, Andheri (W)
Mumbai - 400 053, India
Tel : + 91 22 26730101 Fax : + 91 22 26731891
Email : sales@radix.co.in www.radix.co.in
Exports email : exports@radix.co.in

BANGALORE C : 0-9341063830
BARODA C : 0-9376215882
CHANDIGARH C : 0-9316460869
CHENNAI C : 0-9381056345
CHHATISGARH C : 0-9329418246
COIMBATORE C : 0-9380284497
GOA C : 0-9371439090

GWALIOR C : 0-9329126120
HP C : 0-9316460869
HYDERABAD C : 0-9391053480
INDORE C : 0-9301995060
KARNATAKA C : 0-9341063831
KERALA C : 0-9341273814
NAGPUR C : 0-9322245543

NEW DELHI C : 0-9312600076
T : 011-25786350
ORISSA C : 0-9337002344
PUNE C : 0-9371113404
T : 020-24479759
PUNJAB C : 0-9316460869