



- Universal input
- Upto 5 setpoints, 4~20 mA + 4 relays
- Isolated 0/4~20 mA or 0-10 V DC for control / retransmission output
- RS485 / MODBUS RTU
- 85~265 V AC SMPS
- Autotuning : From cold start
At setpoint
- Auto / Manual selection
- PID, Proportional and ONOFF control
- PID versions

Standard - relay or analog control output
VMD open + close relay outputs

SPECIFICATIONS All specifications at ambient of 25 °C, unless specified otherwise

<p>INPUTS</p> <p>Input group 1 (common for both inputs)</p> <p>Thermocouple B, E, J, K, N, R, S, T</p> <p>RTD Pt100, 3-wire</p> <p>Voltage 0~50 mV</p> <p>Current 0~20 mA, 4~20 mA</p> <p>Input group 2 (common for both inputs)</p> <p>Thermocouple B, C, D, E, G, J, K, N, R, S, T</p> <p>RTD Pt100, 3-wire, Cu53</p> <p>Current 0~20 mA, 4~20 mA, Square root (for input 1)</p> <p>Voltage 0~50 mV Through DIP selection following voltage inputs are available : 0~1 V, 0~5 V, 0~10 V, 0~10 mV, 0~100 mV, 0~200 mV</p> <p>Transmitter supply (V_{TX}) 22 V nominal, 30 mA max</p> <p>Range limits See Table 1</p> <p>Accuracy See Table 1</p> <p>Cold junction compensation Automatic</p> <p>Sensor break protection User programmable</p> <p>INDICATION</p> <p>Display Upper : 4 digit, 7 segment 0.52" (13.2 mm) red LED display Lower : 4 digit, 7 segment 0.39" (9.9 mm) green LED display</p> <p>Setpoint LEDs for relay status LED for auto/manual status LEDs for communication</p> <p>OUTPUTS</p> <p>No. of setpoints Upto 5</p> <p>No. of relays 1 / 2 / 3 / 4</p> <p>Relay contact type NO-C (RLY 1, 2, 4) NO-C-NC (RLY 3)</p> <p>Relay contact rating 5A / 230V AC, resistive</p> <p>SSR drive 12 V DC drive signal for external SSR</p> <p>No. of analog outputs 0 / 1</p> <p>Current output 4~20 mA / 0~20 mA / 20~4 mA / 20~0 mA isolated from input</p> <p>Maximum load for current output 500 ohms</p> <p>Voltage output 0-10 V / user specified</p> <p>Load for voltage output >10 Kohms</p> <p>AUTO/MANUAL OPERATION</p> <p>Function Output power is increased / decreased by UP/DOWN keys in manual mode</p> <p>Auto / Manual transfer Bumpless</p>	<p>COMMUNICATION</p> <p>Port RS485</p> <p>Protocol Modbus RTU</p> <p>Slave ID User programmable (1~256)</p> <p>PROGRAMMABLE PARAMETERS</p> <p>Setpoint Full range (See Table 1)</p> <p>Unit °C, °F, EU</p> <p>Resolution User selectable 0.01, 0.1 or 1 for linear input, 0.1 or 1 for temperature</p> <p>High scale Full range (See Table 1)</p> <p>Low scale Full range (See Table 1)</p> <p>Digital filter A (minimum) ~ F (maximum)</p> <p>Hysteresis (ONOFF control) 0~25% span</p> <p>Bias (for process variable) -50 to 50% of range limit</p> <p>Band (P) 0.1~999.9%</p> <p>Integral time (I) Off, 1~9999 seconds</p> <p>Derivative time (D) Off, 1~9999 seconds</p> <p>Cycle time for SP1/SP2 1~640 second</p> <p>Upper limit for output power 0~100%</p> <p>Lower limit for output power 0~100%</p> <p>Relay logic a. Heat b. Cool c. Fullscale high alarm d. Full scale low alarm e. Deviation high alarm f. Deviation low alarm g. Inband alarm h. Outband alarm (e. to h. available for SP2, SP3, SP4 only)</p> <p>Alarm types Self reset or latched and can be disabled at power on</p> <p>Alarm acknowledge Front panel function used to reset relay in alarm condition</p> <p>Setpoint lock ON, OFF</p> <p>Level lock ON, OFF</p> <p>Relay action Reverse / direct</p> <p>OTHER</p> <p>Programming Through 3 tactile keys</p> <p>Dimensions (in mm) 72(H) x 72(W) x 100(D)</p> <p>Mounting Panel mount</p> <p>Panel cutout 68 x 68 mm</p> <p>Supply voltage a) 85~265 V AC, 50/60 Hz b) 20~35 V DC (optional)</p> <p>Power consumption 4 watts maximum</p> <p>Operating ambient temperature 0~50 °C</p> <p>Relative humidity Below 90%, non condensing</p>
---	---

TABLE 1


SENSOR / INPUT	RANGE LIMITS (°C / EU)		RANGE IN WHICH ACCURACY IS SPECIFIED		TYPICAL ACCURACY AT 30 °C (°C / EU)	WORST CASE ACCURACY (°C / EU)
	LOW SCALE	HIGH SCALE	LOW SCALE	HIGH SCALE		
Input Group 1						
Pt - 6% Rh / Pt - 30% Rh (B)	400	1820	400	1820	± 3	± 5
Chromel / Constantan (E)	-270	850	0	850	± 1	± 3
Iron / Constantan (J)	-210	760	0	760	± 1	± 3
Chromel / Alumel (K)	-270	1372	-50	1200	± 1	± 3
Nicrosil / Nisil (N)	-270	1300	-50	1200	± 1	± 3
Pt / Pt - 13% Rh (R)	0	1760	400	1760	± 2	± 5
Pt / Pt - 10% Rh (S)	0	1760	400	1760	± 2	± 5
Copper / Constantan (T)	-270	400	-200	400	± 1	± 3
Pt100, 3-wire	-200	850	-200	600	± 0.3	± 1.0
Linear (0~50 mV, 0~20 mA, 4~20 mA)	-1999	9999	-1999	9999	± 5 EU	± 20 EU

Input Group 2

The following inputs are available in Input Group 2 in addition to inputs of Input Group 1.

Tungsten - 5% Rh / Tungsten - 26% Rh (C)	0	2320	0	2320	± 3	± 5
Tungsten - 3% Rh / Tungsten - 25% Rh (D)	0	2310	0	2310	± 3	± 5
Tungsten / Tungsten - 26% Rh (G)	0	2310	0	2310	± 3	± 5
Cu53	0	180	0	180	± 0.3	± 0.5
Linear (0~10 mV, 0~100 mV, 0~200 mV, 0~1 V, 0~5 V, 0~10 V)	-1999	9999	-1999	9999	± 5 EU	± 20 EU
Linear (4~20 mA) with square root	0	9999	0	9999	± 10 EU	± 40 EU

CONNECTION DIAGRAM

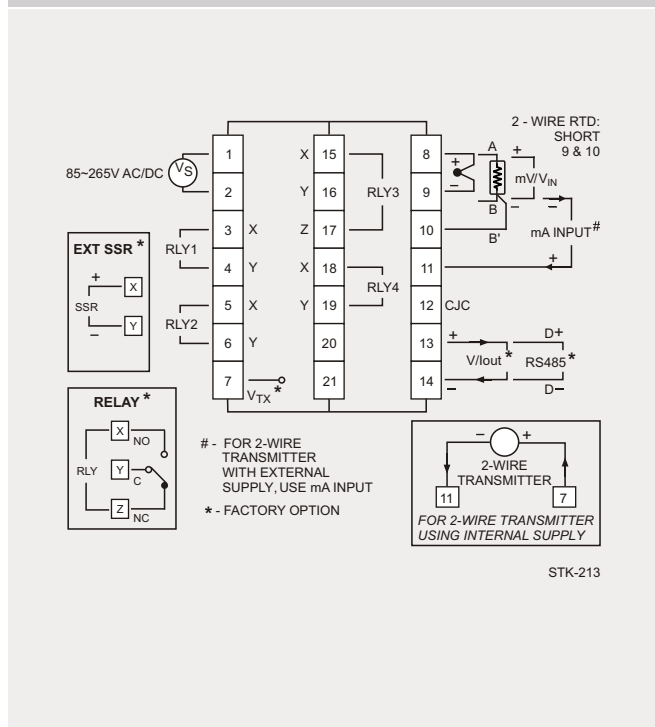

ORDERING INFORMATION

2003	A	B	C	D	E	F	G	H
A Input Group	1 Group1							
	2 Group2							
B Relay1	0 None							
	1 Relay, NO-C							
	2 SSR drive							
C Relay2	0 None							
	1 Relay, NO-C							
	2 SSR drive							
D Relay3*	0 None							
	1 Relay, NO-C-NC							
	2 SSR drive							
H Supply voltage	0 85~265 V AC							
	1 20~35 V DC							
G Software type	0 PID, Standard							
	1 PID, VMD							
F Analog output / Communication	0 None							
	1 0/4~20 mA							
	2 0~10 V DC							
	3 Other analog output#							
	4 RS485							
# Please specify								
E Relay4*	0 None							
	1 Relay, NO-C							
	1 SSR drive							



AN ISO 9001:2000 COMPANY

SALES INQUIRIES

1800-22-radix
1800-22-7234

www.radix.co.in

Radix Electrosystems Pvt Ltd
B-14, 2nd Floor, Ghanshyam Indl Estate
Veera Desai Road, Andheri (W)
Mumbai - 400 053, India
Tel : + 91 22 26730101 Fax : + 91 22 26731891
Email : sales@radix.co.in www.radix.co.in

BANGALORE C : 0-9341063830
BARODA C : 0-9376215882
CHANDIGARH C : 0-9316460869
CHENNAI C : 0-9381056345
CHHATISGARH C : 0-9329418246
COIMBATORE C : 0-9380284497
GOA C : 0-9371439090

GWALIOR C : 0-9329126120
HP C : 0-9316460869
HYDERABAD C : 0-9391053480
INDORE C : 0-9301995060
KARNATAKA C : 0-9341063831
KERALA C : 0-9341273814
NAGPUR C : 0-9322245543

NEW DELHI C : 0-9312600076
T : 011-25786350
ORISSA C : 0-9337002344
PUNE C : 0-9371113404
T : 020-24479759
PUNJAB C : 0-9316460869