



- Universal input
- Upto 5 setpoints, 4~20 mA + 4 relays
- Isolated 0/4~20 mA or 0-10 V DC for control / retransmission output
- RS485 / MODBUS RTU
- 85~265 V AC SMPS
- Autotuning : From cold start
At setpoint
- Auto / Manual selection
- PID, Proportional and ONOFF control
- PID versions
 - Standard - relay or analog control output
 - VMD open + close relay outputs

SPECIFICATIONS All specifications at ambient of 25 °C, unless specified otherwise

INPUT

Input group 1	
Thermocouple	B, E, J, K, N, R, S, T
RTD	Pt100, 3-wire
Voltage	0~50 mV
Current	0~20 mA, 4~20 mA
Input group 2	
Thermocouple	B, C, D, E, G, J, K, N, R, S, T
RTD	Pt100, 3-wire, Cu53
Current	0~20 mA, 4~20 mA, Square root
Voltage	0~50 mV
	Through DIP selection following voltage inputs are available :
	0~1 V, 0~5 V, 0~10 V, 0~10 mV, 0~100 mV, 0~200 mV
Transmitter supply (V_{TX})	22 V nominal, 30 mA max
Range limits	See Table 1
Accuracy	See Table 1
Cold junction compensation	Automatic
Sensor break protection	User programmable

INDICATION

Process variable	Upper : 4 digit, 7 segment 0.56" (14.2 mm) red LED display Lower : 4 digit, 7 segment 0.56" (14.2 mm) green LED display
Setpoint	
Status indication	LEDs for relay status LEDs for setpoint indication LED for auto/manual status LEDs for communication

OUTPUTS

No. of setpoints	5 if Analog output is used for control 4 if Relay1 is used for control
No. of relays	1 / 2 / 3 / 4
Relay contact type	NO-C-NC
Relay contact rating	5A / 230V AC, resistive
SSR drive	12 V DC drive signal for external SSR
No. of analog outputs	0 / 1
Current output	4~20 mA / 0~20 mA / 20~4 mA / 20~0 mA isolated from input
Maximum load for current output	500 ohms
Voltage output	0-10 V / user specified
Load for voltage output	>10 Kohms

AUTO/MANUAL OPERATION

Function	Output power is increased / decreased by UP/DOWN keys in manual mode
Auto / Manual transfer	Bumpless

COMMUNICATION

Port	RS485
Protocol	Modbus RTU
Slave ID	User programmable (1~256)

PROGRAMMABLE PARAMETERS

Setpoint	Full range (See Table 1)
Unit	°C, °F, EU
Resolution	User selectable 0.01, 0.1 or 1 for linear input, 0.1 or 1 for temperature
High scale	Full range (See Table 1)
Low scale	Full range (See Table 1)
Digital filter	A (minimum) ~ F (maximum)
Hysteresis (ONOFF control)	0~25% span
Offset	-50 to 50% of range limit
Band (P)	0.1~999.9%
Integral time (I)	Off, 1~9999 seconds
Derivative time (D)	Off, 1~9999 seconds
Cycle time for SP1/SP2	1~640 second
Upper limit for output power	0~100%
Lower limit for output power	0~100%
Relay logic	a. Heat b. Cool c. Fullscale high alarm d. Full scale low alarm e. Deviation high alarm f. Deviation low alarm g. Inband alarm h. Outband alarm (e. to h. available for SP2, SP3, SP4 only)
Alarm types	Self reset or latched and can be disabled at power on
Alarm acknowledge	Front panel function used to reset relay in alarm condition
Setpoint lock	ON, OFF
Level lock	ON, OFF
Relay action	Reverse / direct

OTHER

Programming	Through 3 tactile keys
Dimensions (in mm)	96(H) x 96(W) x 100(D)
Mounting	Panel mount
Panel cutout	92 x 92 mm
Supply voltage	a) 85~265 V AC, 50/60 Hz b) 20~35 V DC (optional)
Power consumption	4 watts maximum
Operating ambient temperature	0~50 °C
Relative humidity	Below 90%, non condensing

TABLE 1


SENSOR / INPUT	RANGE LIMITS (°C / EU)		RANGE IN WHICH ACCURACY IS SPECIFIED		TYPICAL ACCURACY AT 30 °C (°C / EU)	WORST CASE ACCURACY (°C / EU)
	LOW SCALE	HIGH SCALE	LOW SCALE	HIGH SCALE		
Input Group 1						
Pt - 6% Rh / Pt - 30% Rh (B)	400	1820	400	1820	± 3	± 5
Chromel / Constantan (E)	-270	850	0	850	± 1	± 3
Iron / Constantan (J)	-210	760	0	760	± 1	± 3
Chromel / Alumel (K)	-270	1372	-50	1200	± 1	± 3
Nicrosil / Nisil (N)	-270	1300	-50	1200	± 1	± 3
Pt / Pt - 13% Rh (R)	0	1760	400	1760	± 2	± 5
Pt / Pt - 10% Rh (S)	0	1760	400	1760	± 2	± 5
Copper / Constantan (T)	-270	400	-200	400	± 1	± 3
Pt100, 3-wire	-200	850	-200	600	± 0.3	± 1.0
Linear (0~50 mV, 0~20 mA, 4~20 mA)	-1999	9999	-1999	9999	± 5 EU	± 20 EU

Input Group 2

The following inputs are available in Input Group 2 in addition to inputs of Input Group 1.

Tungsten - 5% Rh / Tungsten - 26% Rh (C)	0	2320	0	2320	± 3	± 5
Tungsten - 3% Rh / Tungsten - 25% Rh (D)	0	2310	0	2310	± 3	± 5
Tungsten / Tungsten - 26% Rh (G)	0	2310	0	2310	± 3	± 5
Cu53	0	180	0	180	± 0.3	± 0.5
Linear (0~10 mV, 0~100 mV, 0~200 mV, 0~1 V, 0~5 V, 0~10 V)	-1999	9999	-1999	9999	± 5 EU	± 20 EU
Linear (4~20 mA) with square root	0	9999	0	9999	± 10 EU	± 40 EU

CONNECTION DIAGRAM

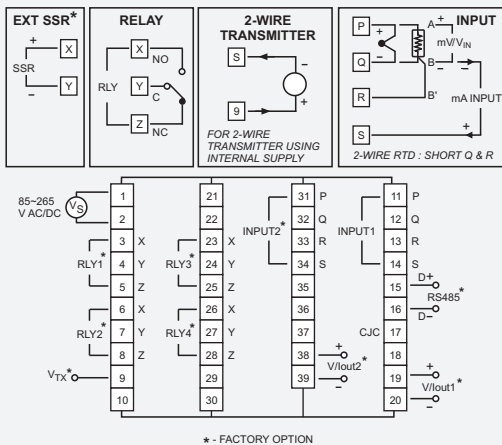

ORDERING INFORMATION

ORDER CODE	
2005	A

A	Configuration			
	SSR drive	Relay	RS485	4~20 mA output
00	0	2	0	0
01	0	2	0	1
02	0	4	0	0
03	0	4	0	1
04	0	2	1	0
05	0	4	1	0
06	0	4	1	1
07	1	2	0	0

Ordering Options

The following ordering options are available on request. Minimum order quantity and/or minimum order value may apply.

	Option	Details
1.	Analog output	0~10 V DC
2.	Supply voltage	24 V DC
3.	Input type	Group 2



INSTRUMENTS T : + 91 22 42537777 x 701 F : + 91 22 42537700 E : sales@radix.co.in
 SENSORS T : + 91 22 42537777 x 732 F : + 91 22 42537700 E : sensors@radix.co.in
 GAUGES T : + 91 22 42537777 x 733 F : + 91 22 42537700 E : gauges@radix.co.in
 AUTOMATION C : 0-9322405471 C : 0-9324319150 E : automation@radix.co.in

SALES INQUIRIES

1800-22-radix
1800-22-7234

Radix Electrosystems Pvt Ltd, B-14, 2nd Floor, Ghanshyam Indl Estate, Veera Desai Road, Andheri (West), Mumbai - 400 053, India
 Tel : + 91 22 42537777 Fax : + 91 22 42537700 Email : sales@radix.co.in www.radix.co.in

www.radix.co.in