

PROGRAMMABLE ONOFF CONTROLLER ————— FLP TC96

UNIVERSAL INPUT, 2 SETPOINTS, I/V OUT



- Universal input :
 - 8 thermocouples, Pt100, 0/4~20 mA
 - 0/4~20 mA, 0~10 V DC
- 0 / 1 / 2 setpoints
- Isolated 0/4~20 mA or 0~10 V DC retransmission output
- 85~265 V AC SMPS or 20~35 V DC or 24 V AC (factory option)
- Functions : ONOFF and Time Proportional
- Accuracy : $\pm 0.1\%$ of full scale $\pm 1^\circ\text{C}$, typical
- Sensor break indication

SPECIFICATIONS

All specifications at ambient of 25 °C, unless specified otherwise

INPUTS

Input group 1	
Thermocouple	B, E, J, K, N, R, S, T
RTD	Pt100
Linear input	4~20 mA, 0~20 mA
Input group 2	
Linear input	4~20 mA, 0~20 mA, 0~10 V DC
Load resistance for 0/4~20 mA input	250 Ω , internally provided
Transmitter supply	22 V DC, Nominal, 30 mA max (17 V DC available across transmitter; for HART transmitter, please inquire)

Range limits	See Table 1
Accuracy	See Table 1
Cold junction compensation	Automatic
Temperature coefficient of accuracy	$\pm 0.5\%$ of span / 25 °C

Units	
Pt100, Thermocouple	$^\circ\text{C}$ (For $^\circ\text{F}$, contact us)
Linear	EU

OUTPUTS

No. of relays	0/1/2 electromagnetic relays
Relay contact type	NO-C-NC
Relay contact rating	5A / 230V AC, resistive
SSR drive	12 V DC drive signal for external SSR
Retransmission output	Current or voltage
Current output	4~20 mA / 0~20 mA isolated from input
Maximum load for current output	600 ohms
Voltage output	0~10 V DC isolated from input
Load for voltage output	>10 Kohms
Mutual isolation between input/output/supply	1 KV AC / 1 minute

INDICATION

Display	Upper : 4 digit, 7 segment 0.56" (14.2 mm) red LED display Lower : 4 digit, 7 segment 0.56" (14.2 mm) green LED display
Status indication	2 LEDs for relay status

PROGRAMMABLE PARAMETERS

Setpoint	Full range (See Table 1)
Hysteresis / band	0.1 to 99.9 $^\circ\text{C}$
Resolution	1 (for TC) 0.1, 1 (for Pt 100) 0.001, 0.01, 0.1, 1 (for Linear input)
Bias	-99.9 to 99.9
High scale	Full range (See Table 1)
Low scale	Full range (See Table 1)
Control functions	ONOFF, Time Proportional Control (TPC) (RLY1), ONOFF (RLY2)
Cycle time for TPC	1 ~ 99 seconds
Relay logic	a. Heat b. Cool c. Full scale high alarm d. Full scale low alarm
Proportional offset	-99.9 to 99.9 $^\circ\text{C}$ (RLY1)

ENCLOSURE

Keyboard	3 Pushbuttons
Enclosure	Certified flameproof for gas groups I, IIA & IIB Aluminium alloy
Material	Aluminium alloy
Dimensions (in mm)	352(H) x 190(W) x 170(D)
Protection	IP65
Mounting	Wall mount
Mounting accessories	Included
Cable entries*	5 x 3/4" ET
* Cable glands to be ordered separately	


OTHER

Supply voltage	a) 85~265 V AC, 50/60 Hz b) 20~35 V DC c) 24 V AC $\pm 10\%$, 50/60 Hz 4 watts maximum 0 ~ 50 $^\circ\text{C}$
Power consumption	4 watts maximum
Operating ambient temperature	0 ~ 50 $^\circ\text{C}$
Relative humidity	Below 90%, non condensing


PROGRAMMABLE ONOFF CONTROLLER ——— FLP TC96

UNIVERSAL INPUT, 2 SETPOINTS, I/V OUT

RELAY LOGIC

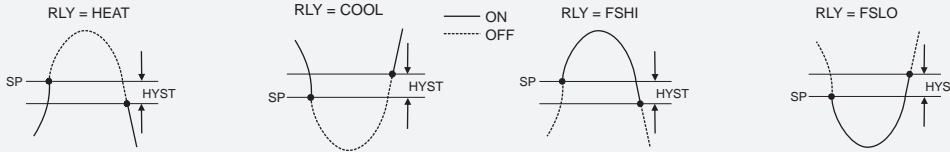

ONOFF CONTROL (Relay1, Relay2)

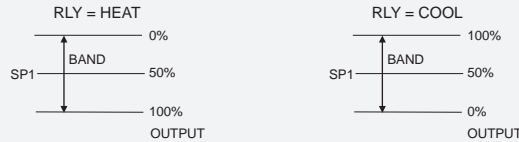


TIME PROPORTIONAL CONTROL (Relay1 only)

TABLE 1

SENSOR / INPUT	RANGE LIMITS (°C / EU)		RANGE IN WHICH ACCURACY IS SPECIFIED		TYPICAL ACCURACY AT 30 °C (°C / EU)	WORST CASE ACCURACY (°C / EU)
	LOW SCALE	HIGH SCALE	LOW SCALE	HIGH SCALE		
Iron / Constantan (J)	-99	750	0	750	± 1	± 3
Chromel / Alumel (K)	-99	1350	-50	1200	± 1	± 3
Pt / Pt - 13% Rh (R)	0	1760	0	1760	± 2	± 5
Pt / Pt - 10% Rh (S)	0	1760	0	1760	± 2	± 5
Copper / Constantan (T)	-99	400	-50	400	± 1	± 3
Nicrosil / Nisil (N)	-99	1300	-50	1200	± 1	± 3
Pt - 6% Rh / Pt - 30% Rh (B)	400	1820	400	1820	± 3	± 5
Chromel / Constantan (E)	-99	900	0	800	± 1	± 3
Pt100, 3-wire	-99	850	-50	850	± 0.5 *	± 2.0
Linear 0~20 mA, 4~20 mA, 0~10 V DC	-1999	9999	-1999	9999	± 5 EU	± 20 EU

* ± 0.1°C in the range -50 to +400 °C

CONNECTION DIAGRAM

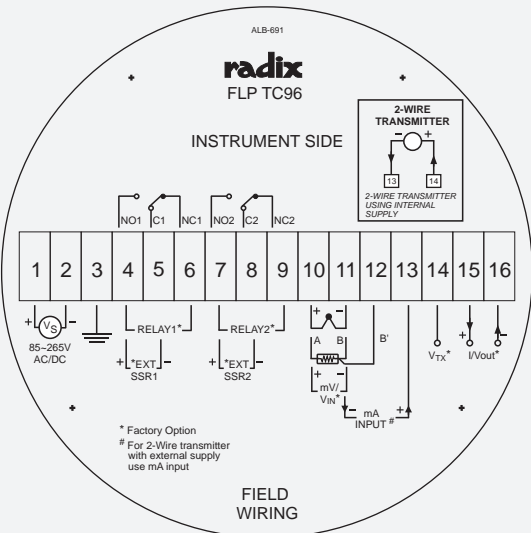

ORDERING INFORMATION

2197	A	B	C	D	E
A	Input type group				
1	8 thermocouples, Pt100, 0/4~20 mA				
2	0/4~20 mA, 0~10 V DC				
B	Relay1				
0	None				
1	Relay, NO-C-NC				
2	SSR drive				
C	Relay2				
0	None				
1	Relay, NO-C-NC				
2	SSR drive				
D	Analog output				
0	None				
1	0/4~20 mA				
2	0~10 V DC				
3	Other				
E	Supply voltage				
0	85~265 V AC				
1	20~35 V DC				
2	24 V AC ±10%				

Product url : www.radix.co.in/flp.htm



AN ISO 9001:2008 COMPANY

SALES INQUIRIES

1800-22-radix
1800-22-7234

www.radix.co.in

Radix Electrosystems Pvt Ltd
B-14, 2nd Floor, Ghanashyam Indl Estate
Veera Desai Road, Andheri (W)
Mumbai - 400053, India
Tel : + 91 22 26730101 / 42537777
Fax : + 91 22 26731891 / 42537700
Email : sales@radix.co.in • www.radix.co.in

BANGALORE C : 0-9341063830
BARODA C : 0-9376215882
CHANDIGARH C : 0-9316460869
CHENNAI C : 0-9381056345
CHHATISGARH C : 0-9337002344
COIMBATORE C : 0-9380284497
GANDHIDHAM C : 0-9377546388

GOA C : 0-9371439090
GWALIOR C : 0-9301995060
HP C : 0-9316460869
HYDERABAD C : 0-9391053480
INDORE C : 0-9301995060
KARNATAKA C : 0-9341063830
KERALA C : 0-9349342306

NAGPUR C : 0-9322245543
NEW DELHI C : 0-9312600076
T : 011-25786350
ORISSA C : 0-9337002344
PUNE C : 0-9371113404
T : 020-24479759
PUNJAB C : 0-9316460869