




- 4 ~ 20 mA in, 4 ~ 20 mA out
- Isolation between input and output :
- 1.5 KV AC RMS / 1 minute,
- 250 V AC RMS continuous
- 0.1% transfer accuracy
- 5 V loop drop
- 0 ~ 500 load without trimming
- DIN rail mounting
- No power supply required

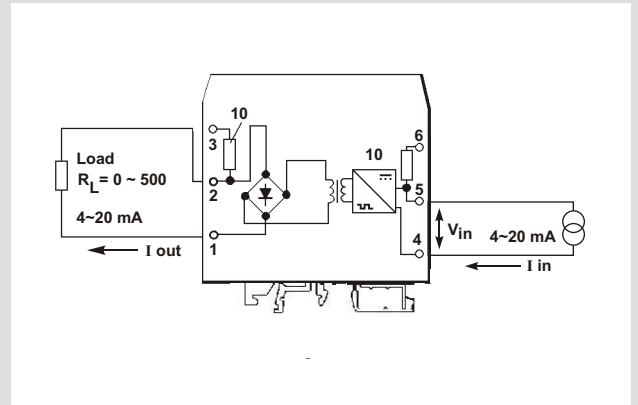

GENERAL

LPI61 is a loop powered isolator suitable for a variety of applications. It can be used, for example, to isolate the 4~20 mA current signal from a 2-wire thermocouple transmitter or temperature controller, and pass it on to a PLC or datalogger. LPI61 eliminates earth and ground loop problems and simplifies interfacing. LPI61 does not require load trimming. Its accuracy is specified for any load between 0 & 500 ohms.

SPECIFICATIONS All specifications at ambient of 25 °C, unless specified otherwise

| | |
|--|--|
| <p>INPUT</p> <p>Input current 4 ~ 20 mA DC</p> <p>Voltage drop across input terminals < 5V DC with zero ohms load on output</p> <p>Reverse polarity protection Provided for current inputs</p> <p>Maximum input current 50 mA</p> <p>OUTPUT</p> <p>Nominal current transfer ratio 1:1 in the range of 4~20 mA</p> <p>Permissible load resistance 0 ~ 500 ohms without load trim</p> <p>ACCURACY</p> <p>Linearity & calibration < 0.1% of span (I out = I in 16 A)</p> <p>Temperature coefficient of accuracy 0.01% of span per °C</p> <p>ISOLATION</p> <p>Input/Output isolation a) 1.5 KV AC RMS, 1 minute b) 250 V AC RMS, continuous</p> | <p>CALIBRATION</p> <p>Zero, Span 20-turn potentiometers on front face</p> <p>ENCLOSURE</p> <p>Material ABS plastic</p> <p>Dimensions 80(H) x 25(W) x 85(D) mm</p> <p>Mounting Snap on for 35 mm DIN rail to DIN 46277</p> <p>Connection, single / stranded wires 2.5 mm², AWG 14</p> <p>Weight 200 grams</p> <p>Protection IP 20</p> <p>TEMPERATURE, HUMIDITY</p> <p>Ambient, storage -20 to +85 °C</p> <p>Ambient, operation -20 to +70 °C</p> <p>Relative humidity 0 ~ 95%</p> |
| <p>ORDER CODE</p> | <p>2106</p> |

SALES INQUIRIES

1800-22-radix
1800-22-7234

www.radix.co.in



Radix Electrosystems Pvt Ltd
B-14, 2nd Floor, Ghanshyam Indl Estate
Veera Desai Road, Andheri (W)
Mumbai - 400 053, India
Tel : + 91 22 26730101 Fax : + 91 22 26731891
Email : sales@radix.co.in www.radix.co.in
Exports email : exports@radix.co.in

BANGALORE C : 0-9341063830
BARODA C : 0-9376215882
CHANDIGARH C : 0-9313560869
CHENNAI C : 0-9381056345
CHHATISGARH C : 0-9337002344
COIMBATORE C : 0-9380284497
GOA C : 0-9371439090

GWALIOR C : 0-9322245543
HP C : 0-9313560869
HYDERABAD C : 0-9391053480
INDORE C : 0-9301995060
KARNATAKA C : 0-9341063831
KERALA C : 0-9341273814
NAGPUR C : 0-9322245543

NEW DELHI C : 0-9312600076
T : 011-25786350
ORISSA C : 0-9337002344
PUNE C : 0-9371113404
T : 020 24479759
PUNJAB C : 0-9316460869
0-9312600076