





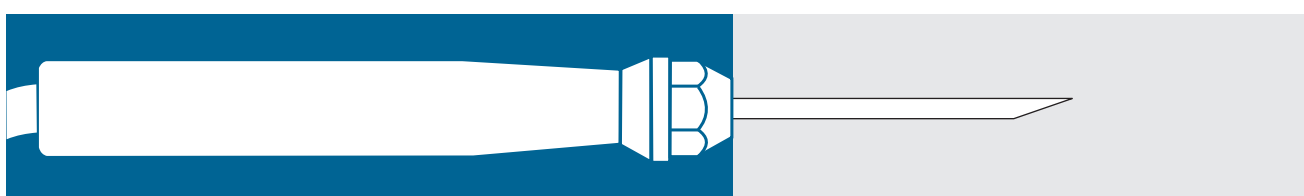
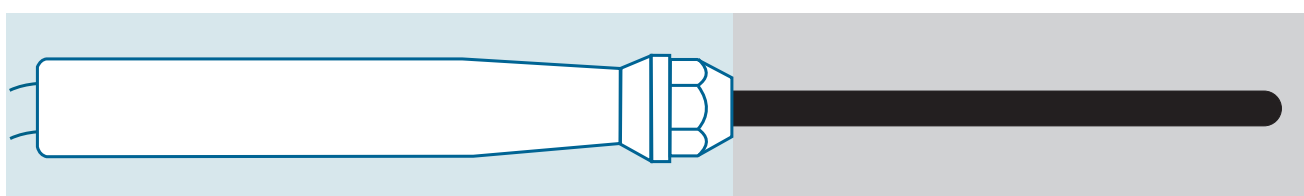


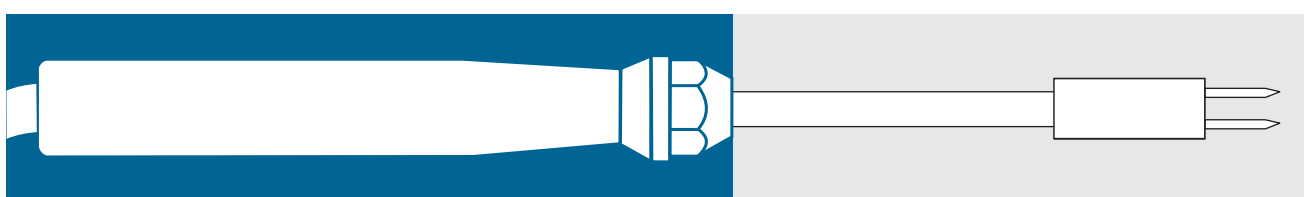

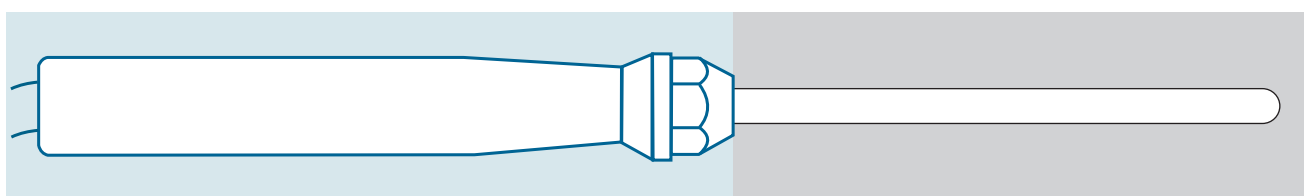

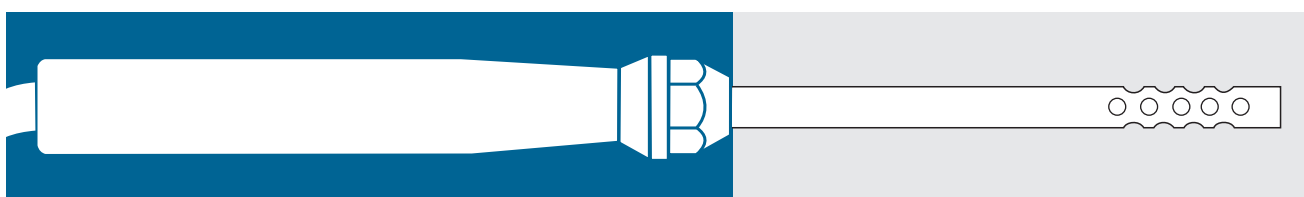

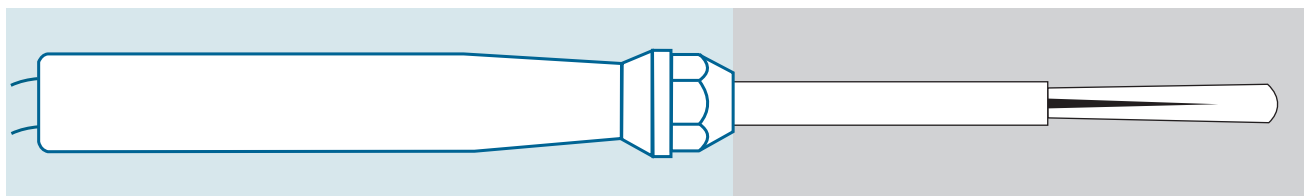


HANDLE PROBES FOR PORTABLE THERMOMETERS












RTD PROBES FOR PORTABLE THERMOMETERS


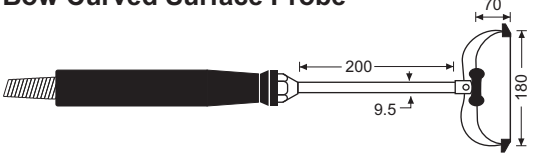
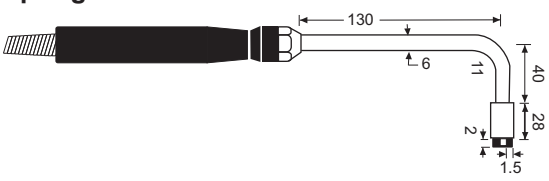
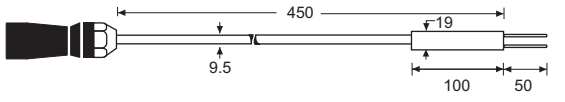
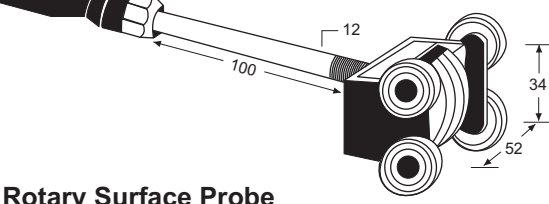
<p>Standard Immersion Probe</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>0 ~ 250 °C</p>	<p>ORDER CODE</p> <p>AC12001210</p>
<p>Standard Immersion Probe (MI)</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-50 ~ 400 °C</p>	<p>ORDER CODE</p> <p>AC13001210</p>
<p>Standard Immersion Probe (MI)</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-100 ~ 400 °C</p>	<p>ORDER CODE</p> <p>AC13011210</p>
<p>Quick Response Immersion Probe (MI)</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-50 ~ 400 °C</p>	<p>ORDER CODE</p> <p>AC13021210</p>
<p>Teflon Coated Immersion Probe</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 200 °C</p>	<p>ORDER CODE</p> <p>AC12061210</p>
<p>Needle Probe</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 200 °C</p>	<p>ORDER CODE</p> <p>AC12081210</p>
<p>Prick Probe</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-50 ~ 200 °C</p>	<p>ORDER CODE</p> <p>AC12121210</p>
<p>Air Probe - 250 °C</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 250 °C</p>	<p>ORDER CODE</p> <p>AC12141310</p>
<p>Air Probe - 400 °C</p>  <p>Pt100</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 400 °C</p>	<p>ORDER CODE</p> <p>AC12151310</p>

- RTD handle probes are supplied with a 1 metre PVC cable.
- RTD handle probes are supplied with a round shell 3-pin connector compatible with Radix Handheld Thermometers (Accurad 71, Unirad) as a standard.

THERMOCOUPLE PROBES FOR PORTABLE THERMOMETERS

<p>Standard Immersion Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-50 ~ 800 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC1101110</p>	
<p>Quick Response Immersion Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-50 ~ 600 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC1102110</p>	
<p>High Temperature Immersion Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-50 ~ 1150 °C</p> <p>INCONEL 600 sheath and MI construction allows measurement in air and liquids upto 1150 °C. Not suitable for salt bath / molten metal / flue gas applications.</p>	<p>DIA</p> <p>3mm 4.5mm 6mm 8mm</p>	<p>ORDER CODE</p> <p>KB1103110 KB1105110 KB1104110 KB1101110</p>	
<p>Teflon Coated Immersion Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-25 ~ 200 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC1106110</p>	
<p>Needle Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-50 ~ 600 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC1108110</p>	
<p>Prick Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-50 ~ 400 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC1112110</p>	
<p>Air Probe</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-25 ~ 400 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC10141310</p>	
<p>Leaf Surface Probe - 400 °C</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-25 ~ 400 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC10181310</p>	
<p>Leaf Surface Probe - 600 °C</p>  <p style="text-align: right;">TC K</p>	<p>TEMPERATURE RANGE</p> <p style="text-align: center;">-25 ~ 600 °C</p>		<p>ORDER CODE</p> <p style="text-align: center;">KC10211310</p>	

THERMOCOUPLE PROBES FOR PORTABLE THERMOMETERS

<p>Leaf Surface Probe - 800 °C</p>  <p>TC K</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 800 °C</p>	<p>ORDER CODE</p> <p>KC10201310</p>
<p>Bow Curved Surface Probe</p>  <p>TC K</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 800 °C</p>	<p>ORDER CODE</p> <p>KC10241310</p>
<p>Spring Surface Probe</p>  <p>TC K</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 400 °C</p>	<p>ORDER CODE</p> <p>KC10261310</p>
<p>Smithy Probe</p>  <p>TC K</p>	<p>TEMPERATURE RANGE</p> <p>-50 ~ 1200 °C</p>	<p>ORDER CODE</p> <p>KC10281310</p>
<p>Rotary Surface Probe</p>  <p>TC K</p>	<p>TEMPERATURE RANGE</p> <p>-25 ~ 250 °C</p>	<p>ORDER CODE</p> <p>KC10301310</p>

- TC K (thermocouple) handle probes are supplied with a 1 metre coiled green PVC cable.
- TC K (thermocouple) handle probes are supplied with a round shell 3-pin connector compatible with Radix Handheld Thermometers (Digirad 71, Unirad) as a standard.
- These can also be supplied with miniature, flat-pin Quick-Disconnect connectors commonly used in thermometers of other makes.
- Order codes shown are for round shell 3-pin connector.

radix
AN ISO 9001:2000 COMPANY

SALES INQUIRIES

1800-22-radix
1800-22-7234

www.radix.co.in

Radix Electrosystems Pvt Ltd
B-14, 2nd Floor, Ghanshyam Indl Estate
Veera Desai Road, Andheri (W)
Mumbai - 400 053, India
Tel : + 91 22 26730101 Fax : + 91 22 26731891
Email : sales@radix.co.in www.radix.co.in

BANGALORE C : 0-9341063830
BARODA C : 0-9376215882
CHANDIGARH C : 0-9316460869
CHENNAI C : 0-9381056345
CHHATISGARH C : 0-9329418246
COIMBATORE C : 0-9380284497
GOA C : 0-9371439090

GWALIOR C : 0-9329126120
HP C : 0-9316460869
HYDERABAD C : 0-9391053480
INDORE C : 0-9301995060
KARNATAKA C : 0-9341063831
KERALA C : 0-9341273814
NAGPUR C : 0-9322245543

NEW DELHI C : 0-9312600076
T : 011-25786350
ORISSA C : 0-9337002344
PUNE C : 0-9371113404
T : 020-24479759
PUNJAB C : 0-9316460869