



WIRELESS TRANSMITTER-RECEIVER SYSTEM RTD, THERMOCOUPLE, %RH

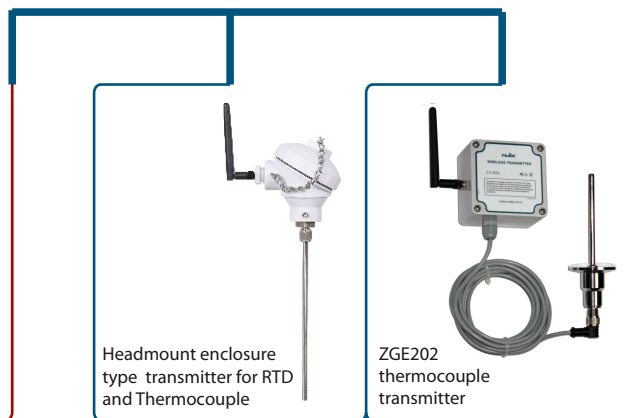

ZGB201 USB powered receiver which receive data from transmitter

ZGU201 utility for display transmitter data & to process same for data logging or chart display

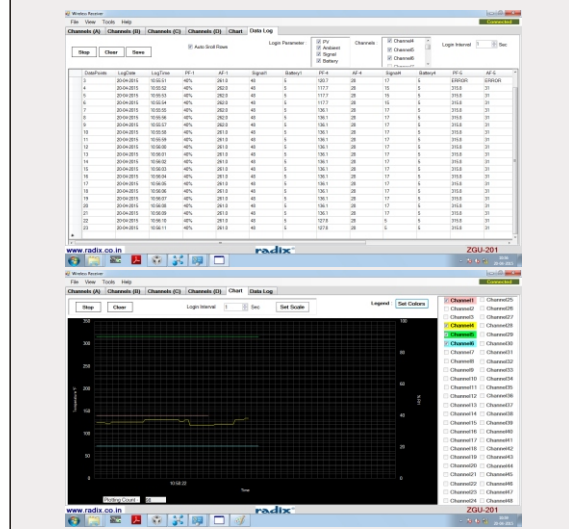

FEATURES

- Transmitter (Surface and Head Designs)
RTD : Pt100
Thermocouple : J, K, T, E, R, S, B, N
% RH
- Range : Up to 120 m outdoor line of sight
Up to 40 m indoor / urban
- Router to extend range
- Receiver with USB port
- Free utility software
- Full-featured SCADA optional
- Battery life : Minimum 1 year
- Transmit interval : 2 to 3600 seconds

CAT#507R0

ENQUIRIES

Instruments: sales@radix.co.in
Sensors: sensors@radix.co.in
Gauges: gauges@radix.co.in
Automation: automation@radix.co.in
Level: level@radix.co.in

RADIX ELECTROSYSTEMS PVT LTD
EL-135/136/137, Electronics Zone
TTC Indl. Area, MIDC, Mahape
Navi Mumbai - 400 710, India
+ 91 22 42537777 • sales@radix.co.in

radix®
www.radix.co.in